






CINTAS REDONDAS SEGUNDO NBR 15637-2					
					
Código de cores	Simples direto	Simples em Forca (choker)	Simples em Basket	Simples em Basket 0° - 45°	Simples em Basket 45° - 60°
Capacidade de cargas em Kg					
	1000	800	2.000	1.400	1.000
	2000	1.600	4.000	2.800	2.000
	3000	2.400	6.000	4.200	3.000
	4000	3.200	8.000	5.600	4.000
	5000	4.000	10.000	7.000	5.000
	6000	4.800	12.000	8.400	6.000
	8000	6.400	16.000	11.200	8.000
	10000	8.000	20.000	14.000	10.000




- Temperaturas e utilização:
sem proteção de -40°C a +100°C
com proteção de -20°C a +100°C
- Nunca utilizar em canto vivo ou superfícies muito ásperas sem proteção adicional.
Não dar nós.
- A etiqueta indicadora deve estar visível.
- Passar ganchos de acordo a passar materiais sintéticos e devem ser inspecionados regularmente.
- Antes da utilização em álcalis, pergunte ao consultor.


**Durável,
protege a carga,
econômica e
de fácil manuseio**

CINTAS DE POLIÉSTER



CINTAS PLANAS SEGUNDO NBR 15637-1

					
Código de cores	Simples direto	Simples em Forca (choker)	Simples em Basket	Simples em Basket 0° - 45°	Simples em Basket 45° - 60°
Capacidade de cargas em Kg					
	1.000	800	2.000	1.400	1.000
	2.000	1.600	4.000	2.800	2.000
	3.000	2.400	6.000	4.200	3.000
	4.000	3.200	8.000	5.600	4.000
	5.000	4.000	10.000	7.000	5.000
	6.000	4.800	12.000	8.400	6.000
	8.000	6.400	16.000	11.200	8.000
	10.000	8.000	20.000	14.000	10.000

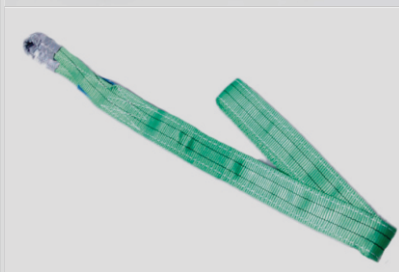

Fator de segurança 7:1;
Corpo duplo;
Múltiplos de 0,50m;
Comprimento mínimo: 1,5m

